

ACTIA do Brasil

Av. São Paulo, 555 – Porto Alegre – RS – Brazil

CEP: 90230-161

Phone: +55 (51) 3358-0200

www.actia.com.br



ActiaDiskTool

Contents

1.	ActiaDiskTool	3
1.1.	Software Interface	4
1.2.	Device formatting	6

All information is subject to change without notice. Please confirm the sales representative before starting to design your system.

1. ActiaDiskTool

ActiaDiskTool is a software used to export the recording from SDCard/HDD to PC. The user can use this tool to export only Alarm, only recording or all black box.


ActiaDiskTool can be used to convert the recordings to the AVI standard.

Double clic on **DiskTool.exe** to start the software.

 config.ini	17/11/2017 16:46	Parâmetros de co...	1 KB
 ConverBlockToBsonFile.dll	29/06/2017 15:40	Extensão de aplica...	653 KB
 ConverBvvTo264.dll	27/12/2016 14:03	Extensão de aplica...	227 KB
 DeviceManger.dll	26/02/2015 14:06	Extensão de aplica...	1.364 KB
 DiskTool.exe	06/11/2017 17:13	Aplicativo	3.191 KB
 EvidUpload.dll	20/04/2017 11:34	Extensão de aplica...	789 KB
 FileListManager.dll	20/04/2017 11:34	Extensão de aplica...	313 KB
 hi_h264dec_w.dll	03/05/2016 14:20	Extensão de aplica...	420 KB


- ActiaDiskTool not is installed.
- Only SD/HDD formatted in the MDVR standard will be recognized by the tool.

1.1. Software Interface

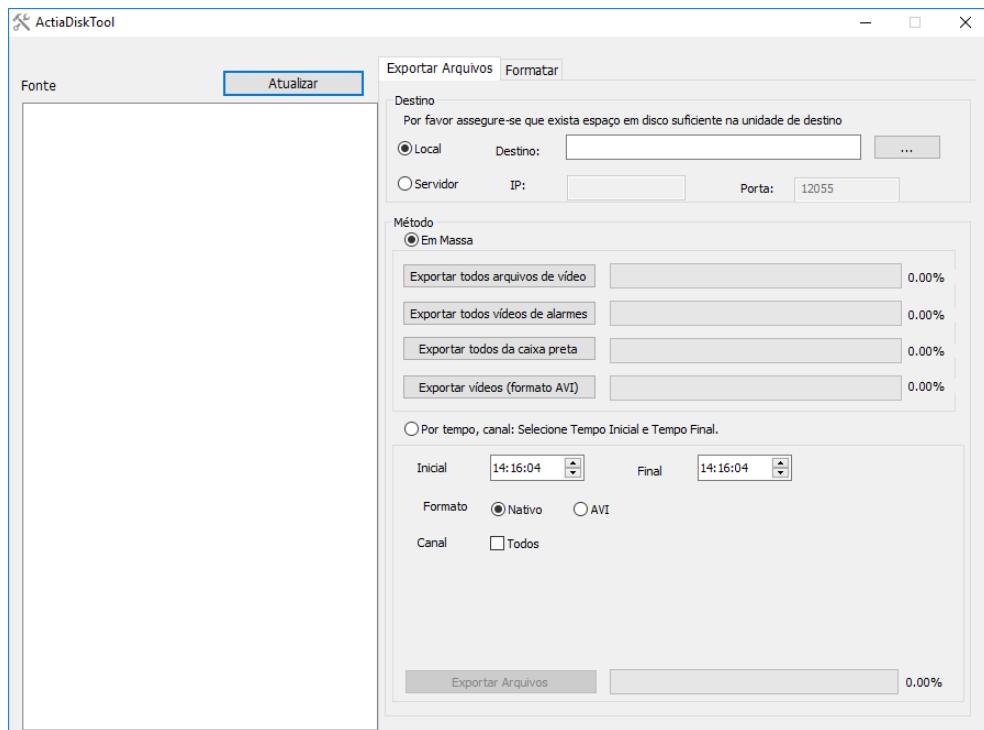

Connect a SDCard or HDD in a USB port and click **Atualizar** button.

All information is subject to change without notice. Please confirm the sales representative before starting to design your system.

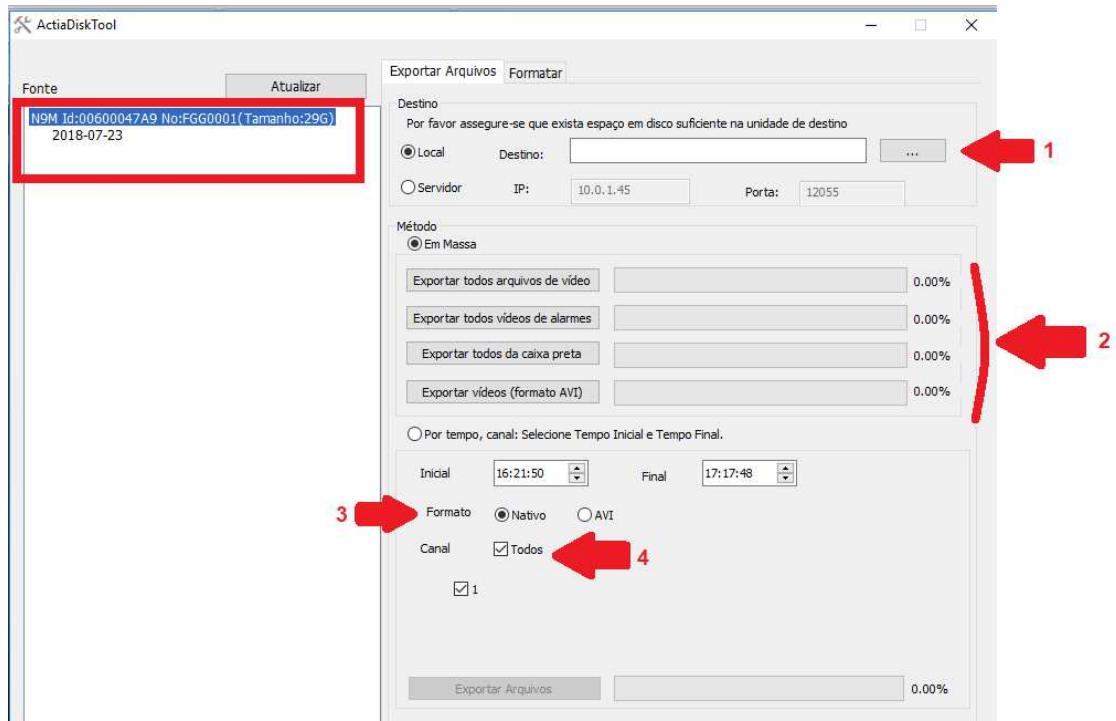

1 Select a destination folder.

2 Select a type of information that you need to export.

2.1 – Exportar todos arquivos de vídeo – only recordings without alarm.

2.2 – Exportar todos videos de alarmes – only alarm recordings.

2.3 – Exportar todos da caixa preta – all recordings (alarm and vídeo).

3 Video output format.


3.1 – Nativo – native format from MDVR. Viewing is only possible using specific software

3.2 – AVI – AVI format.

4 Channels to export – The user can choose the channels to export. All channels or a specific channel (selecting a checkbox).

1.2. Device formatting

After export the recordings the user can to format the device (SD or HDD).

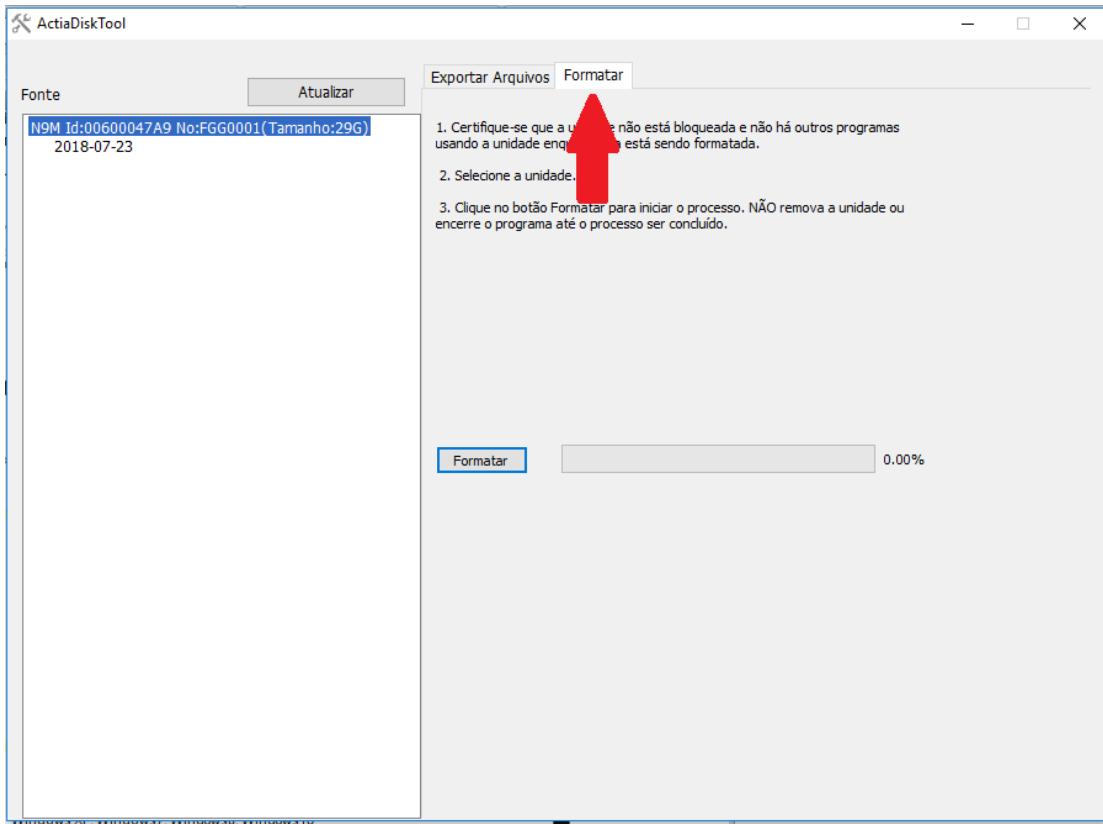

1 Select Formatar

2 Make sure.

2.1 – The drive is not locked and there are no other programs using the drive while it is being formatted.

2.2 – Select the drive.

2.3 – Click the Format Button to start the process. Please DO NOT remove the drive or exit the program until the process has completed.